


Fig. 1 — ALLSTATE «Cruisair» Motor Scooter

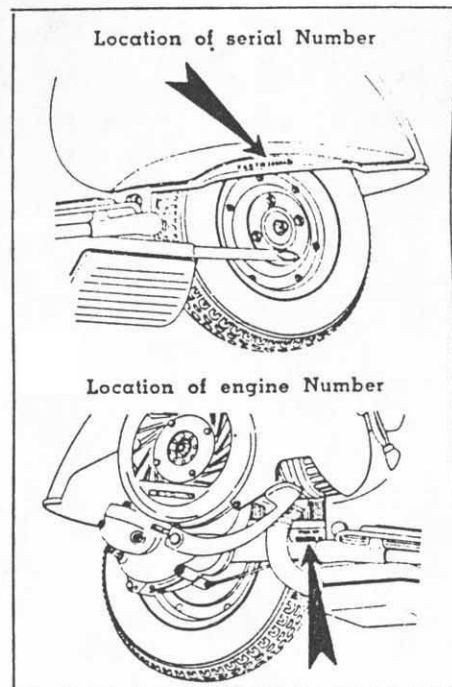

### WARNING

In order to keep your ALLSTATE Scooter in perfect running condition and not to void the guarantee, always have your machine repaired at a Sers, Roebuck and Co. Store.

Special care should be taken in regard to the fuel mixture which should be **regular gasoline** and oil of the make, grade and in the amount prescribed in this booklet.

**Ethyl gasoline should never be used.**

**Do not use Allstate compounded motor oil or other Premium Heavy Duty Motor Oil with detergents.**

The inexperienced operator should exercise caution in applying front wheel brake, to avoid locking.

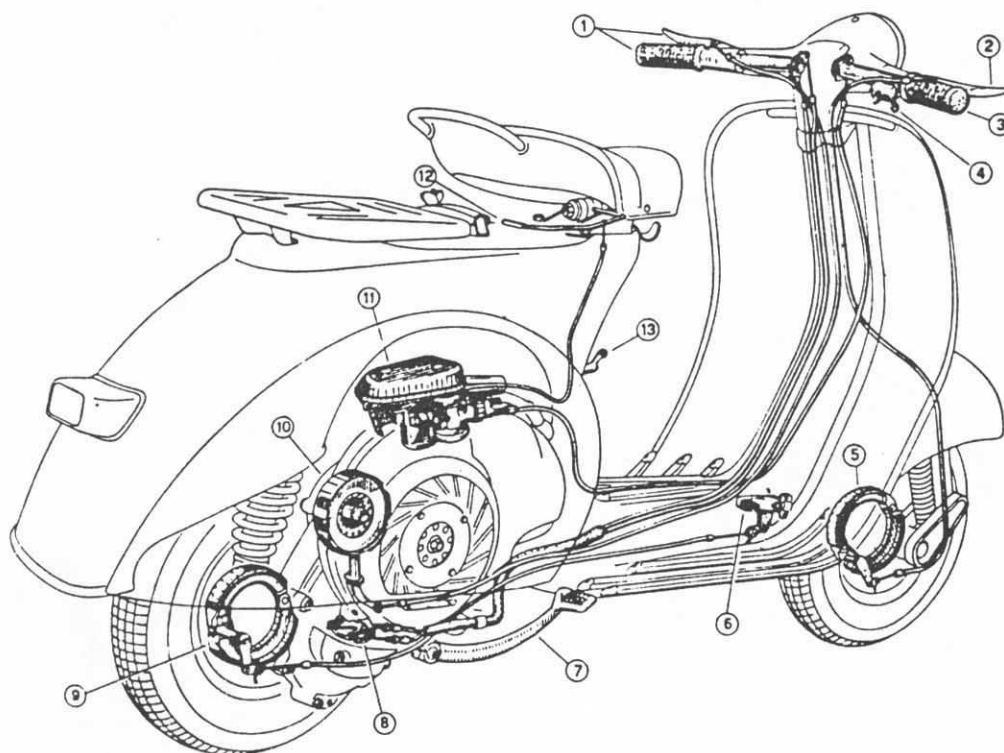


Fig. 2 - Controls of Allstate Scooter

1. Gear change twistgrip with clutch control lever
2. Front brake lever
3. Throttle control grip
4. Light and dimmer switch
5. Front brake jaws
6. Rear brake lever
7. Gear shifter
8. Rear brake jaws
9. Clutch
10. Carburator, air cleaner
11. Choke control lever
12. Fuel cock

